DRIVE THE CHANGE









MAXIMUM EFFICIENCY



Endless hours of testing and □ne tuning made the C60 the best in its class for performance and reliability. We created a durable machine with maintenance cost close to none.

UNDERCARRIAGE



Our undercarriage is like no one. Our Cormidi R&D department put all its experience towards creating the best undercarriage available on the market.

SIMPLY INCREDIBLE



The Cormidi design lab created a machine that mixes industrial design with strength, power and easy to use







STRENGTHS



the machine's undercarriage, unique to the Cormidi line, has suspensions follow the terrain profile for increased stability and comfort.



4 Large and sturdy hooks to move the machine in total safety, plus 2 for towing.



C60 has all approved and certified safety support, making it one of the most secure unit in the world.



the operators has a perfect access to all the controls and can keep all the parameters under control.



Mechanical parking and emergency brake.



Complete with horn, throttle, and 12V outlet.



the design of the engine compartment allows easy access to all the component for routine maintenance.



The C60 has a powerful radiator with fan and thermostat to cool the hydraulic system.



when the situation needs a shorter unit, the stand can be closed, otherwise it opens to let the operator in.







THE BENCHMARK



with its 5 models and 20 possible version it can be tailored to answer anyone's need.

HEAVY DUTY



with increased safety, incredible performance and still easy to drive the C60 is at the top of its class

STURDY AND POWERFUL



Long lasting undercarriage, reduce need for maintenance, incredible power and reduced fuel consumption make the c60 an incredible unit.












RIA	RI	AC	HI	HIAC
			XI	XI

DIMENSIONS








CAPACITY

BE-DE-BHE DHE-ACDHE-DEAC	0,15 m³ 0,2 yd³	STRUCK 0,22 m³ 0,29 yd³	NEAPED SAE 0,28 m³ 0,37 yd³
RIA		STRUCK 0,13 m³ 0,17 yd³	SAE

TECHNICAL DATA

	METRIC			U.S.		6.60	9.60
ENGINE							
Petrol	Honda GX 270 9 hp						•
Diesel	Yanmar LA 70 7.5 hp					•	
TRANSMISSION							
Туре	Hydrostatic				•	•	
Hydraulic pump	n°3 Gear pump				•	•	
TRACKS							
Crawler width	180 mm (7.1 in)					•	•
Rocking rollers	Yes					•	•
HYDRAULIC SYSTEM						•	•
Hydraulic pump		Gear pump					
Flow	1x16 l/min (1x4.2 gpm)					•	•
max pressure	170 bar (2466 psi)			•	•		
PERFORMANCE AND DIM	ENSIONS						
Max. travel speed	approx 0-3.6 Km/h			(0-2.3 mph)		•	•
Operative weight	600 kg (1			(1320 LB)		•	•
Weight	BE 463 kg /1021 lb	BHE 552 kg /1217 lb		ACBE 506 kg /1116 lb ACBHE 628 kg /1385 lb			•
	DE 476 kg /1049 lb	DHE 567 kg / 1250 Lb	DEA	C 520 kg / 1146 Lb	ACDHE 638 kg / 1407 Lb	•	
Vessel contents	0,25 m³ - 0,33 yd³					•	•
Parking brake	Yes					•	•
	<u> </u>						

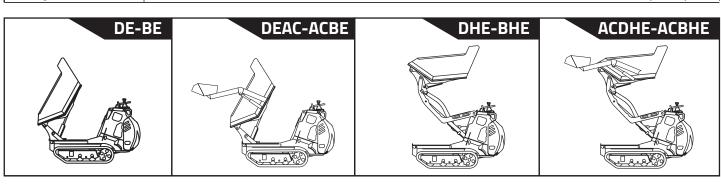



DRIVE THE CHANGE

